



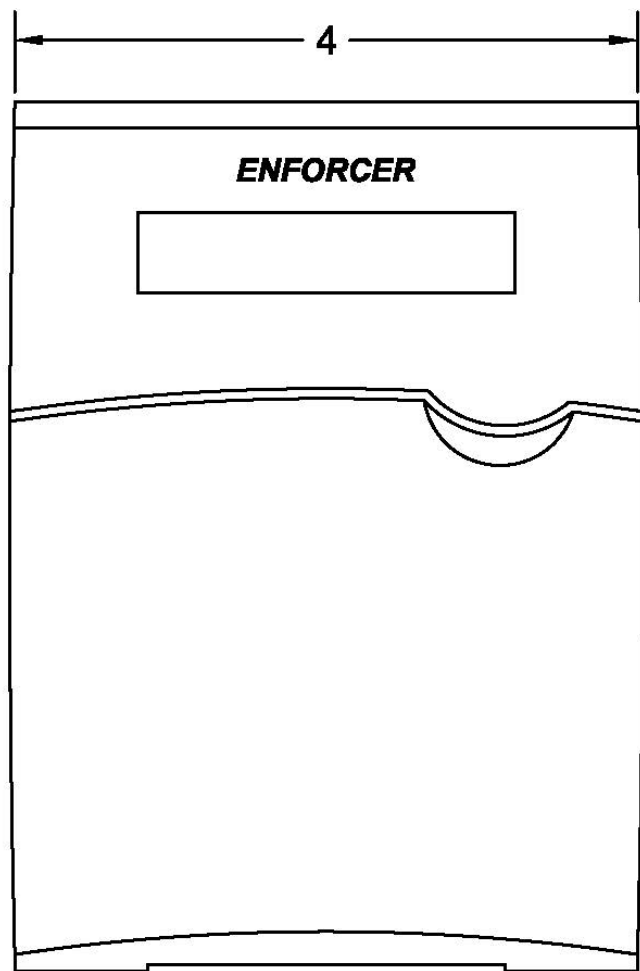

“C16” Land-line Auto Dialer

Standard Features & Benefits

- Operating voltage: 10-18VDC
- Remote notification of alarm situation via phone call
- Custom record messages made on-site via built-in microphone
- Send up to 12s pre-recorded site message + up to 6s alarm message
- No third-party service contract required
- Program up to 6 contacts
- Requires hard-wired phone line (terminal blocks inside unit)

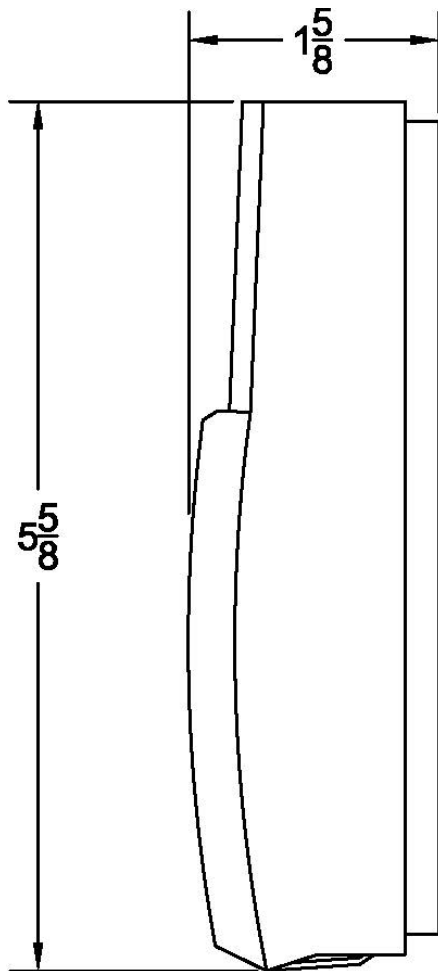


* Note: Support for up to 2 input circuits. Consult the factory for available configurations. Standard configuration assumes high-water-alarm only.

“C16” Land-line Auto Dialer

Connections

Wires enter the unit through an opening on the back along the top end. Remove the top end of the unit for access.

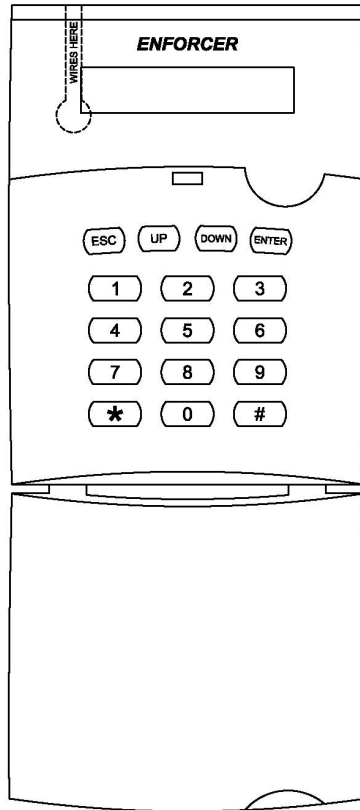

Note: Phone line must be hard-wired to the terminal block inside the unit.

